

Roc

Joan Gaspar

marset

Wall light for indoor and outdoor use, with a pressed glass diffuser. Its wavy shade covers the light, softens it, and creates an inviting atmosphere. Now, Roc evolves to provide even more light and expands its collection with two new sizes and a white

finish. All versions include an accessory that acts as a filter to reduce glare and screen the light. Roc resembles a shining block of ice, with an irregular texture that begs you to touch it.



Roc Mini

Code	Finish	Input	Luminaire	CCT	CRI
A701-520-35-27K	● White - (RAL 9003)	Constant Voltage 24Vdc 2.95W	108.6lm	2700K	CRI90
A701-520-35-30K	● White - (RAL 9003)	Constant Voltage 24Vdc 2.95W	113.8lm	3000K	CRI90
A701-520-39-27K	● Black - (RAL 9005)	Constant Voltage 24Vdc 2.95W	108.6lm	2700K	CRI90
A701-520-39-30K	● Black - (RAL 9005)	Constant Voltage 24Vdc 2.95W	113.8lm	3000K	CRI90

Dimmable: Yes
 Integrated dimmer: No
 Dimming protocols: Based on specified driver


Materials
 Structure: Aluminum
 Shade: Pressed glass

Product notes: Requires 24V remote driver.
 LED included

Fixture net weight: 1.1 lb

Wire installation: Hardwired

Suitable for wet locations

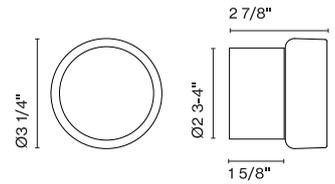


   **IP65**

Roc Mini remote power supply

Code	Description	Dimming
968-230	60W - 24V	0-10V


Product type: Power supply
 INPUT: 120-277 VAC 50/60Hz
 OUTPUT: CV 24V DC 60W max.



The installation and location of the remote LED driver **and any required enclosure** must be in accordance with **applicable codes and laws** and will be the exclusive responsibility of the installation company. **Marset does not provide remote driver enclosures.**


Code	Description	Dimming
A968-372	60W - 24V	TRI-DIM (Triac / ELV, 0-10V)

Product type: Power supply
 INPUT: 120-277 VAC 50/60Hz
 OUTPUT: CV 24V DC 60W max.



Code	Description	Dimming
A968-373	96W - 24V	TRI-DIM (Triac / ELV, 0-10V)

Product type: Power supply
 INPUT: 120-277 VAC 50/60Hz
 OUTPUT: CV 24V DC 96W max.



Roc Mini downward anti-glare accessory

Code	Finish
A701-514	● Black

Materials
 Structure: Stainless steel


Product type: Accessory
 Product notes: Accessory to reduce glare and guide light downward



Roc Mini



Roc Mini with Downward anti-glare accessory

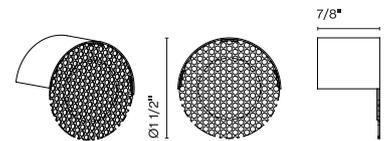

Roc

Code	Finish	Input	Luminaire	CCT	CRI
A701-501-39-27K	● Black - (RAL 9005)	120VAC 60Hz 8.5W	421.6lm	2700K	CRI90
A701-501-39-30K	● Black - (RAL 9005)	120VAC 60Hz 8.5W	441.6lm	3000K	CRI90

Dimmable: Yes
 Integrated dimmer: No
 Dimming protocols: TRIAC/ELV (10-100%)


Materials
 Structure: Aluminum
 Shade: Pressed glass

Product notes: LED included

Fixture net weight: 3.62 lb

Wire installation: Hardwired

Suitable for wet locations

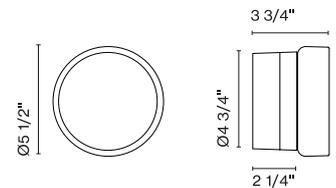

Roc Plus

Code	Finish	Input	Luminaire	CCT	CRI
A701-503-39-27K	● Black - (RAL 9005)	120VAC 60Hz 9.5W	540.5lm	2700K	CRI90
A701-503-39-30K	● Black - (RAL 9005)	120VAC 60Hz 9.5W	566lm	3000K	CRI90

Dimmable: Yes
 Integrated dimmer: No
 Dimming protocols: TRIAC/ELV (10-100%)


Materials
 Structure: Aluminum
 Shade: Pressed glass

Product notes: LED included

Fixture net weight: 5.29 lb

Wire installation: Hardwired

Suitable for wet locations

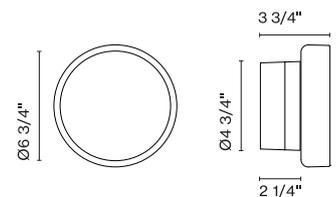

Roc Low Voltage


Code	Finish	Input	Luminaire	CCT	CRI
A701-515-39-27K	● Black (RAL 9005)	Constant Current 500mA 7.1W 15Vf	421.6lm	2700K	CRI90
A701-515-39-30K	● Black (RAL 9005)	Constant Current 500mA 7.1W 15Vf	441.6lm	3000K	CRI90

Dimmable: Yes
 Integrated dimmer: No
 Dimming protocols: Based on specified driver

Materials
 Structure: Aluminum
 Shade: Pressed glass

Product notes: Requires remote driver.
 Can be used with third-party driver.
 LED included

Suitable for wet locations

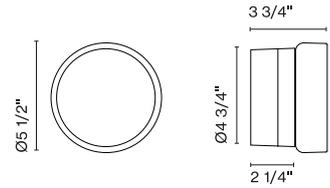

Roc Plus Low Voltage


Code	Finish	Input	Luminaire	CCT	CRI
A701-516-39-27K	● Black (RAL 9005)	Constant Current 500mA 8.3W 17.2Vf	421.6lm	2700K	CRI90
A701-516-39-30K	● Black (RAL 9005)	Constant Current 500mA 8.3W 17.2Vf	441.6lm	3000K	CRI90

Dimmable: Yes
 Integrated dimmer: No
 Dimming protocols: Based on specified driver

Materials
 Structure: Aluminum
 Shade: Pressed glass

Product notes: Requires remote driver.
 Can be used with third-party driver.
 LED included

Suitable for wet locations

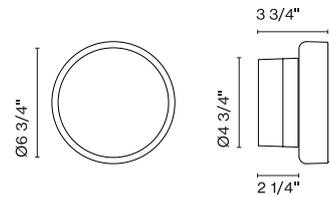

Roc Low Voltage and Roc Plus Low Voltage remote power supply

Code	Description	Dimming
A968-366-500MA	10W CC LED Driver	0-10V (1-100%)

Product type: CLASS 2 Power supply
 INPUT: 120-277 VAC 50/60Hz
 OUTPUT: CC 500mA 10W max.

Product notes: Suitable for powering one Roc Low Voltage or Roc Plus Low Voltage fixture. Not suitable for use with Roc Mini.

The installation and location of the remote LED driver **and any required enclosure** must be in accordance with **applicable codes and laws** and will be the exclusive responsibility of the installation company. **Marset does not provide remote driver enclosures.**



⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

marsetusa@marset.com
 www.marset.com

Download Photometric data file (LDT or IES)
 2D, 3D, Photometric Data
 Assembly instructions