




# Neón de Luz

## Joan Gaspar

**marset**




**Neón de Luz NL - S**

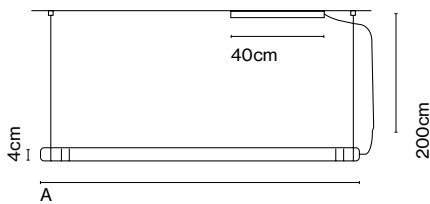

- A** Light source:  
LED SMD 450mA 38,9W 3000K CRI80 5190lm  
Luminaire:  
220 - 240 VAC 40,35W 3020lm  
220 - 240 VAC 40,29W 3020lm
- A** Light source:  
LED SMD 450mA 51,25W 3000K CRI80 8715lm  
Luminaire:  
220 - 240 VAC 55,98W 4274lm  
220 - 240 VAC DALI 55,82W 4274lm

Modular system consisting of polycarbonate profile with an aluminium reflector inside. Chromed zamac brackets. Reactance box in white polycarbonate.

● Aluminium



Translucent electrical cord

- [Download](#) Assembly Instructions
- [Download](#) Photometric Data
- [Download](#) 2D
- [Download](#) 3D

**Range**



Néon de Luz marks an inflexion point in the conventional modular systems as it abandons the coldness that distinguishes this type of lighting.