



Dipping light

Jordi Canudas

marset

On it is mesmerizing: its different shades of paint filter the light creating a magical ambience. Off it transforms into a multi-coloured glass sphere, with a strong aesthetic impact. The paint acts as a shade, colouring the light and

giving it texture. The pendant version of the Dipping Light sheds all unnecessary elements and retains only what is essential: colour takes centre stage. It is available in four different diameters: 5, 8, 12 and 15,7 inches.



Dipping light 13


Code	Finish	Dimming	Electrical
A691-473-35-27K	White	on/off	on/off
A691-473-45-27K	Green	on/off	Electrical Rating: 90 - 264VAC 50-60Hz 6W
A691-473-30-27K	Amber	on/off	Luminaire: 203lm
A691-473-40-27K	Burgundy	on/off	CCT: 2700K
A691-473-47-27K	Chocolate	on/off	CRI: 90
A691-473-37-27K	Cream	on/off	0-10V
A691-474-35-27K	White	0-10V	Electrical Rating: 110 - 127VAC 50-60Hz 6W
A691-474-45-27K	Green	0-10V	Luminaire: 203lm
A691-474-30-27K	Amber	0-10V	CCT: 2700K
A691-474-40-27K	Burgundy	0-10V	CRI: 90
A691-474-47-27K	Chocolate	0-10V	
A691-474-37-27K	Cream	0-10V	

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: 0-10V

Materials
Diffuser: Brilliant white blown glass globe with layered paint
Cover: Polycarbonate
Canopy: Metal

Dry locations only

LED included



Dipping light 13 - 24V

Code	Finish	Electrical
A691-457-35-27K	White	Electrical Rating: 24Vdc 5W
A691-457-45-27K	Green	Luminaire: 203lm
A691-457-30-27K	Amber	CCT: 2700K
A691-457-40-27K	Burgundy	CRI: 90
A691-457-47-27K	Chocolate	
A691-457-37-27K	Cream	


Dimmable: Yes
Integrated dimmer: No
Dimming protocols: Dependent on purchased power supply.

Product notes: Use with cluster accessory

Materials
Diffuser: Brilliant white blown glass globe with layered paint
Cover: Polycarbonate

Dry locations only

LED included



Dipping light 20


Code	Finish	Dimming	Electrical
A691-475-35-27K	White	on/off	on/off
A691-475-45-27K	Green	on/off	Electrical Rating: 90 - 264VAC 50-60Hz 6W
A691-475-30-27K	Amber	on/off	Luminaire: 231lm
A691-475-40-27K	Burgundy	on/off	CCT: 2700K
A691-475-47-27K	Chocolate	on/off	CRI: 90
A691-475-37-27K	Cream	on/off	0-10V
A691-476-35-27K	White	0-10V	Electrical Rating: 110 - 127VAC 50-60Hz 6W
A691-476-45-27K	Green	0-10V	Luminaire: 231lm
A691-476-30-27K	Amber	0-10V	CCT: 2700K
A691-476-40-27K	Burgundy	0-10V	CRI: 90
A691-476-47-27K	Chocolate	0-10V	
A691-476-37-27K	Cream	0-10V	

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: 0-10V on/off

Materials
Diffuser: Brilliant white blown glass globe with layered paint
Cover: Polycarbonate
Canopy: Metal

Dry locations only

LED included



Dipping light 20 - 24V


Code	Finish	Electrical
A691-459-35-27K	White	Electrical Rating: 24Vdc 5W
A691-459-45-27K	Green	Luminaire: 231lm
A691-459-30-27K	Amber	CCT: 2700K
A691-459-40-27K	Burgundy	CRI: 90
A691-459-47-27K	Chocolate	
A691-459-37-27K	Cream	

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: Dependent on purchased power supply.

Materials
Diffuser: Brilliant white blown glass globe with layered paint
Cover: Polycarbonate

Dry locations only

LED included



Dipping light 30


Code	Finish	Dimming	Electrical
A691-477-35-27K	White	ELV	ELV
A691-477-45-27K	Green	ELV	Electrical Rating: 100-120VAC 50-60Hz 14W
A691-477-30-27K	Amber	ELV	Luminaire: 379lm
A691-477-40-27K	Burgundy	ELV	CCT: 2700K
A691-477-47-27K	Chocolate	ELV	CRI: 90
A691-477-37-27K	Cream	ELV	0-10V
A691-478-35-27K	White	0-10V	Electrical Rating: 110 - 127VAC 50-60Hz 14W
A691-478-45-27K	Green	0-10V	Luminaire: 379lm
A691-478-30-27K	Amber	0-10V	CCT: 2700K
A691-478-40-27K	Burgundy	0-10V	CRI: 90
A691-478-47-27K	Chocolate	0-10V	
A691-478-37-27K	Cream	0-10V	

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: Phase cut ELV, 0-10V

Materials
Diffuser: Brilliant white blown glass globe with layered paint
Cover: Polycarbonate
Canopy: Metal

LED included

Dry locations only

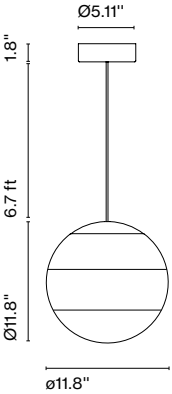

Dipping light 30 - 24V


Code	Finish	Electrical
A691-461-35-27K	White	Electrical Rating: 24Vdc 11.5W
A691-461-45-27K	Green	Luminaire: 379lm
A691-461-30-27K	Amber	CCT: 2700K
A691-461-40-27K	Burgundy	CRI: 90
A691-461-47-27K	Chocolate	
A691-461-37-27K	Cream	

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: Dependent on purchased power supply.

Materials
Diffuser: Brilliant white blown glass globe with layered paint
Cover: Polycarbonate

Dry locations only

LED included




Dipping light 40

Code	Finish	Dimming	Electrical
A691-551-35-27K	White	ELV + 0-10V	Electrical Rating: 120VAC 60Hz 27.5W
A691-551-45-27K	Green	ELV + 0-10V	Luminaire: 1482lm
A691-551-30-27K	Amber	ELV + 0-10V	CCT: 2700K
A691-551-40-27K	Burgundy	ELV + 0-10V	CRI: 90
A691-551-47-27K	Chocolate	ELV + 0-10V	
A691-551-37-27K	Cream	ELV + 0-10V	

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: ELV + 0-10V dimming

Materials
Diffuser: Brilliant white blown glass globe with layered paint
Cover: Polycarbonate
Canopy: Metal

LED included
Dry locations only

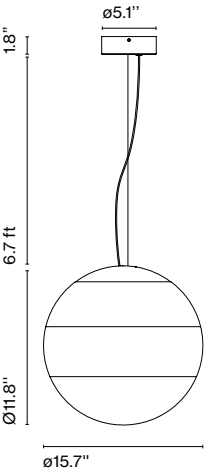

WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Watch the video marsetusa@marset.com
www.marset.com

Download Photometric data file (LDT or IES)
2D, 3D, Photometric Data
Assembly instructions

