



Fris Pro

Joan Gaspar

marset

Drawing thin beams of light in a space with each one of them pointing in any direction. Through the transparent glass we see the lamp's interior, which consists of two profiles: the light source and the aluminum structure. Fris offers

a very versatile and functional design for precise lighting of any type of project. An ingenious system that boldly tackles a previously unresolved issue: to have a set of lamps where each one directs the light individually.



Fris Pro 155

Code	Finish	Electrical Rating	Luminaire	CCT	CRI
A718-054-16-30K	● Black	40W 1050mA	3991lm	3000K	CRI90
A718-054-16-40K	● Black	40W 1050mA	3991lm	4000K	CRI90
A718-054-18-30K	● Bronze	40W 1050mA	3991lm	3000K	CRI90
A718-054-18-40K	● Bronze	40W 1050mA	3991lm	4000K	CRI90

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: See canopy A666-256-16

Electrical Rating: 1050mA constant current 41.5W



LED beam angle: 55°

Materials
Structure: Aluminum
Diffuser: Glass

Wire length: 9.8 ft
Wire installation: Hardwired / Recessed
Color cord: Black



Product notes: 1050mA power supply and hooks (see the accessories section) to be ordered separately.
Tunable White (27K - 40K) available upon request.
4000K available upon request.
LED opening degrees: 30° y 65° available upon request.
LED included

Suitable for Damp locations



Accessories Fris Pro**Rectangular Canopy 50W ELV/0-10V**


Code A666-256-16 Finish ● Black
 Description: Canopy for single or dual installations, one connection point, TRIAC/ELV/0-10V
 Input: 120-277VAC 50/60Hz (ELV / TRIAC only 120VAC)
 Output: CC 1050mA 44W max. (24VDC-42VDC)
 Dimming Protocols: ELV / TRIAC / 0-10
 Suitable for damp locations

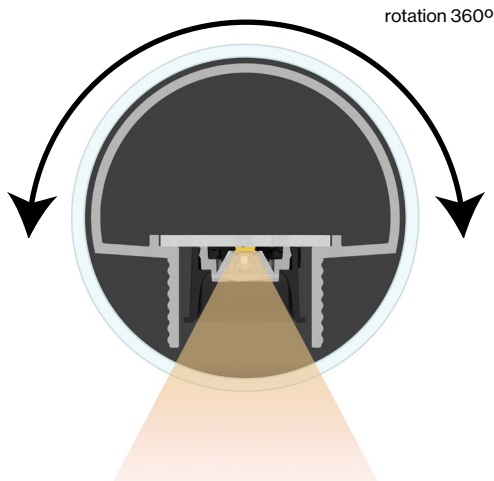**Fris Pro**


- For tasks requiring higher luminance and increased glare control.
 - LED 3000K CRI90 (4000K available upon request).
 - Power supply not included, ordered separately.
- They cannot be connected to each other. Dimmable Dali or Casambi.
- LED beam angle: 55°
(30° and 65° available upon request)
 - Tunable White 2700K 4000K version (available upon request).

Hooks, unions and supports


Hook 47 x1 / A718-065-39




Double hook 96 x1 / A718-066-39



Double hook 71 x1 / A718-067-39



Double hook 146 x1 / A718-068-39



Union 30 / A718-069-39



Union 50 / A718-070-39



Union 100 / A718-071-39



Support 13x2 / A718-072-39




● Black

Product notes: Hooks, unions and supports to make compositions.




Hooks, unions and supports


Hook 47 x2 / A718-061-39




Double hook 96 x2 / A718-062-39




Double hook 71 x2 / A718-063-39



Double hook 146 x2 / A718-064-39

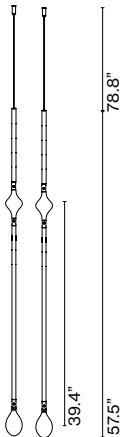

Support Fris A 37 x2 / A718-041-39




Support Fris A 16 x2 / A718-040-39




● Black

Product notes: Hooks, unions and supports to make compositions.




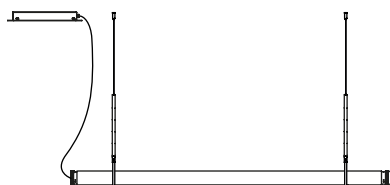


1 unit. Fris Pro 155
1 unit. Hook 50 x2
1 unit. canopy

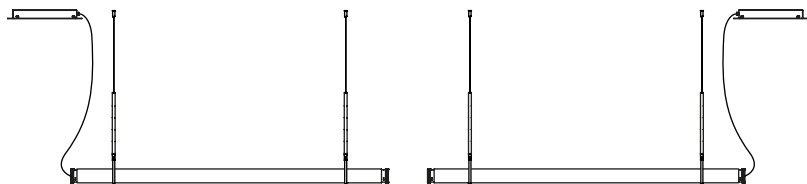

2 units. Fris Pro 155
2 units. Hook 50 x2
2 units. canopy

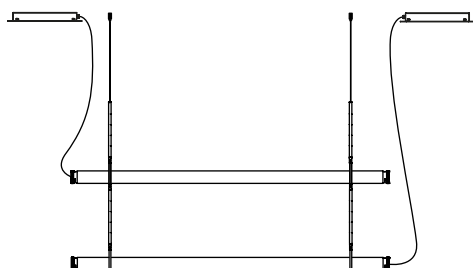

2 units. Fris Pro 155
2 units. Hook doble 96
2 units. canopy

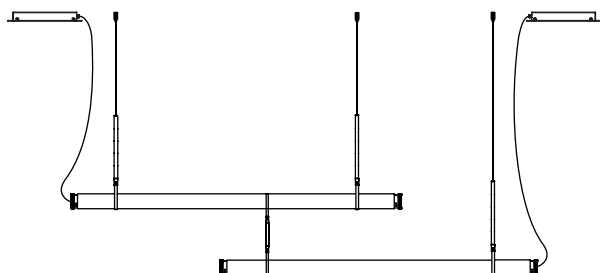

2 units. Fris Pro 155
1 units. Hook 50 x2
1 units. Hook 50 x1
1 units. Union 30
2 units. canopy

⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

marsetusa@marset.com
www.marset.com

Download

Photometric data file (LDT or IES)
2D, 3D, Photometric Data
Assembly instructions