


Luminaire		Measurem.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	
Round Luminaire	Diam.	365 mm	Height	150 mm	
Round Luminous Area	Diam.	330 mm	Height	0 mm	
Horizontal Luminous Area	0.085530 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.020692 m2	
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	90		
Measurement Distance	6.44	Measurement Flux	653.00 lm		
Operator	Asselum T2	Source voltage	230.00 V		
Temperature	20.00 °C	Source current			
Humidity	53.00 %	Photocell	Prc		
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
OSRAM ILCOS HS, HM, HD, HR	64543 B ECO 46W	HALOGENA CLASSIC ECO 46W 2700K	700.00	46.00	1
C.I.E.	31 64 92 100 83	D DIN 5040			
F UTE	0.83 I	B NBN			
		A20			
		BZ 7 / 0.8 / BZ 6			


Diam=365mm



C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 83.37 %
RN 0.00 %

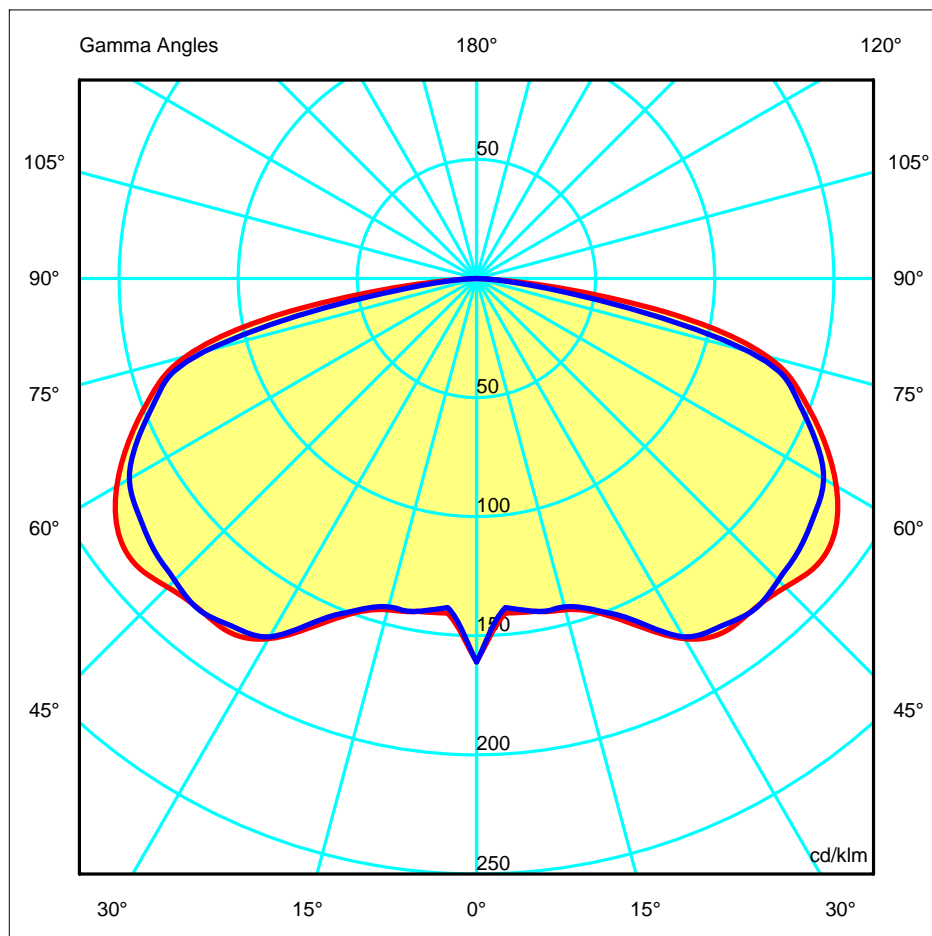

Luminaire		Measur.		Lamp			
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W		
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1		
Line	- MARSET	Date	01-04-2015	Position	Universal		
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm		
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical			
Luminous Intensity Table cd/klm			Table 1/1				
	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	160.90	160.90	160.90	160.90	160.90	160.90	160.90
G 5.0	140.91	146.12	144.87	144.88	142.78	145.31	138.65
G 10.0	141.87	144.80	144.71	145.77	143.01	145.74	141.81
G 15.0	143.96	148.67	148.58	151.22	143.68	147.89	142.67
G 20.0	149.27	152.65	152.65	150.36	147.63	150.50	148.29
G 25.0	160.99	160.12	161.46	157.59	153.14	159.33	158.68
G 30.0	174.64	170.08	165.40	163.71	158.09	169.55	173.64
G 35.0	181.14	178.37	167.96	169.22	162.71	178.35	178.33
G 40.0	181.13	180.36	175.76	172.93	168.89	180.74	181.40
G 45.0	183.26	179.75	180.82	178.44	170.83	179.40	179.13
G 50.0	186.83	177.95	181.19	179.06	172.83	176.24	176.87
G 55.0	183.85	175.73	177.92	174.86	172.36	173.07	173.05
G 60.0	174.33	171.33	172.66	166.89	167.24	167.67	168.23
G 65.0	160.93	161.06	162.01	154.46	157.48	156.97	156.22
G 70.0	145.66	144.86	146.05	136.39	142.80	143.11	142.15
G 75.0	126.29	129.53	126.43	120.14	125.41	127.29	118.25
G 80.0	80.02	56.09	64.20	58.91	65.29	64.01	51.98
G 85.0	19.60	13.98	13.63	14.81	14.60	15.11	11.62
G 90.0	1.31	1.54	1.50	1.45	1.44	1.50	1.57



Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

Diam=365mm

C Halfplanes


180.0 ——— 0.0

270.0 ——— 90.0

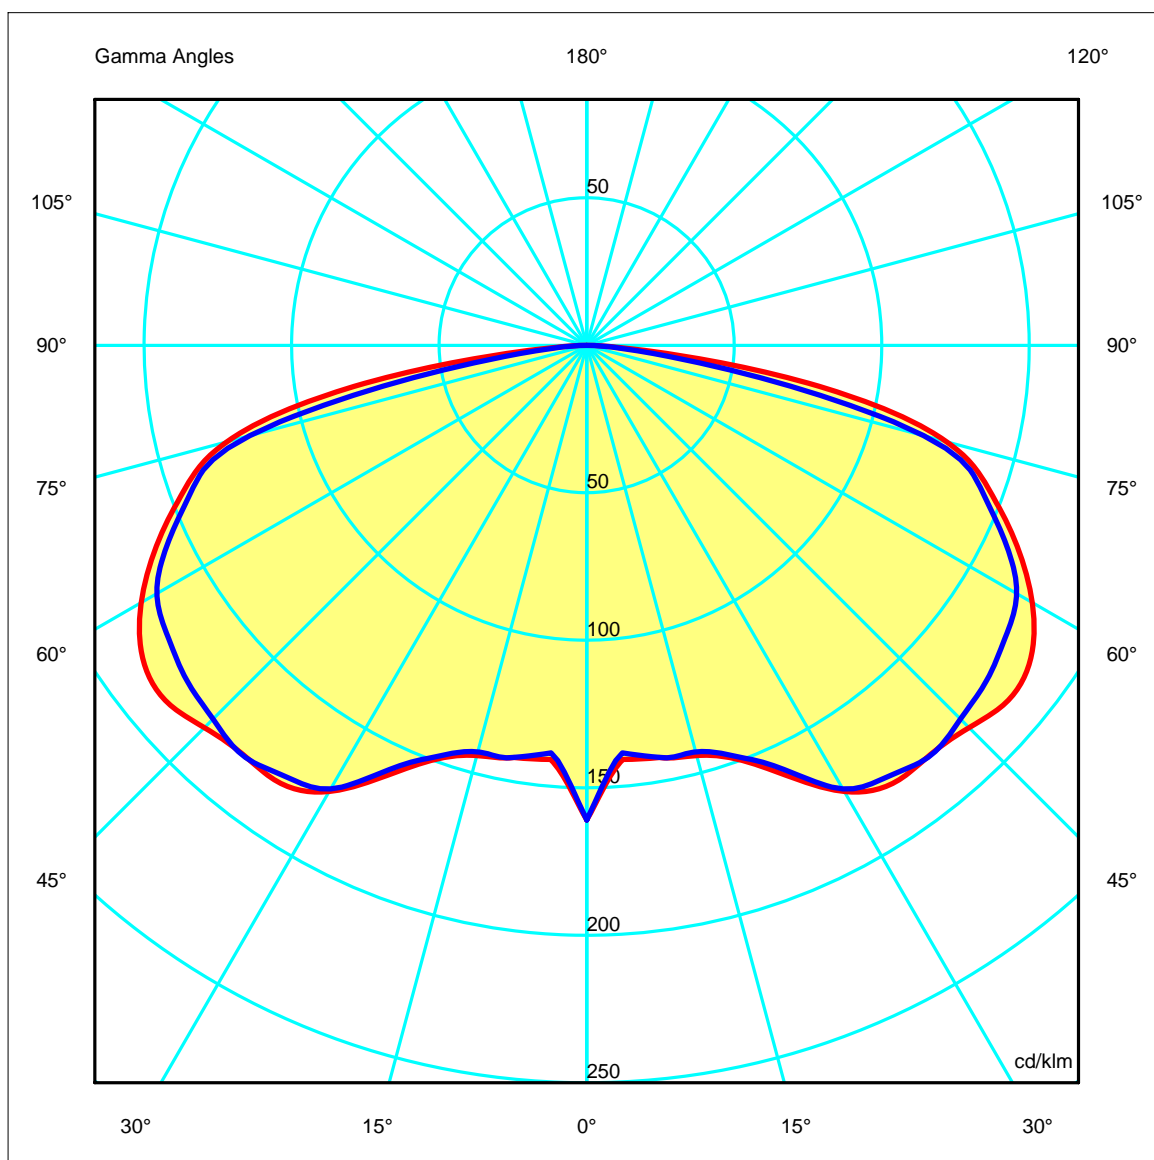

Luminaire		Measurem.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

Diam=365mm



C Halfplanes

180.0 ——— 0.0
270.0 ——— 90.0



Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions										
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.5	18.1	16.8	18.3	18.4	16.3	17.9	16.6	18.1	18.4
x=2H y=3H	19.3	20.7	19.6	21.0	21.1	19.1	20.5	19.4	20.8	21.1
x=2H y=4H	20.7	22.1	21.1	22.4	22.5	20.5	21.9	20.9	22.2	22.5
x=2H y=6H	21.6	22.9	22.0	23.2	23.2	21.3	22.5	21.6	22.9	23.2
x=2H y=8H	21.8	23.0	22.2	23.3	23.3	21.4	22.6	21.8	22.9	23.3
x=2H y=12H	21.8	23.0	22.2	23.4	23.2	21.4	22.6	21.8	22.9	23.2
x=4H y=2H	17.6	18.9	17.9	19.2	19.4	17.4	18.8	17.8	19.1	19.4
x=4H y=3H	20.5	21.7	20.9	22.1	22.3	20.4	21.6	20.8	21.9	22.3
x=4H y=4H	22.1	23.1	22.5	23.5	23.8	22.0	23.0	22.4	23.4	23.8
x=4H y=6H	23.0	23.9	23.4	24.3	24.6	22.8	23.8	23.3	24.2	24.6
x=4H y=8H	23.2	24.1	23.6	24.5	24.7	23.0	23.8	23.4	24.2	24.7
x=4H y=12H	23.3	24.1	23.7	24.5	24.7	23.0	23.8	23.5	24.2	24.7
x=8H y=4H	22.6	23.5	23.1	23.9	24.2	22.5	23.4	23.0	23.8	24.2
x=8H y=6H	23.6	24.4	24.1	24.8	25.1	23.5	24.2	24.0	24.7	25.1
x=8H y=8H	23.9	24.5	24.3	24.9	25.3	23.7	24.4	24.2	24.8	25.3
x=8H y=12H	24.0	24.5	24.5	25.0	25.3	23.8	24.4	24.3	24.8	25.3
x=12H y=4H	22.7	23.5	23.2	23.9	24.2	22.6	23.4	23.1	23.8	24.2
x=12H y=6H	23.7	24.3	24.2	24.8	25.2	23.6	24.2	24.1	24.7	25.2
x=12H y=8H	24.0	24.5	24.5	25.0	25.3	23.8	24.4	24.3	24.8	25.3

Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

Total Flux=700.00 Luminaire Flux=583.57


RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.19	0.27	0.34	0.41	0.47	0.57	0.64	0.69	0.76	0.81	0.90	0.96
RC	8	8	8	7	7	7	7	7	7	7	6	6

		Zonal Flux per 1000 Lumen																	
Y°		10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)		14	56	129	238	375	532	688	808	834	834	834	834	834	834	834	834	834	834

CIE Flux Codes
31 64 92 100 83

C.I.E. 8/8/8/7/7/7/7/7/6/6
D DIN 5040 A20
F UTE 0.83 I
B NBN BZ 7 / 0.8 / BZ 6
RN 0.00000 %
BLF 1.0

LOR 83.36698 %
ULOR 0.00000 %
DLOR 83.36698 %
UFF 0.00000 %
DFF 100.00000 %
FFR 0.00000 %

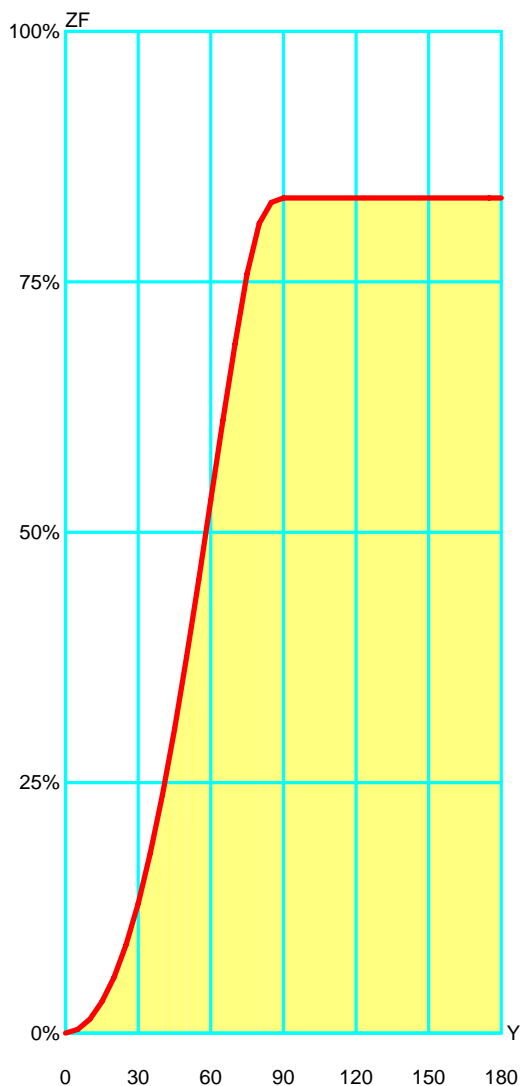


Zonal Flux				
Gamma °	Flux	Sum lm	Flux [%]	Sum [%]
0°	0.00	0.00	0.00%	0.00 %
5°	3.64	3.64	0.44 %	0.44 %
10°	10.31	13.96	1.24 %	1.67 %
15°	17.29	31.25	2.07 %	3.75 %
20°	24.53	55.78	2.94 %	6.69 %
25°	32.41	88.19	3.89 %	10.58 %
30°	41.18	129.37	4.94 %	15.52 %
35°	50.00	179.37	6.00 %	21.52 %
40°	58.29	237.66	6.99 %	28.51 %
45°	65.74	303.41	7.89 %	36.39 %
50°	72.05	375.46	8.64 %	45.04 %
55°	76.88	452.34	9.22 %	54.26 %
60°	79.72	532.07	9.56 %	63.82 %
65°	79.72	611.79	9.56 %	73.38 %
70°	76.29	688.07	9.15 %	82.54 %
75°	70.06	758.13	8.40 %	90.94 %
80°	50.20	808.33	6.02 %	96.96 %
85°	20.93	829.26	2.51 %	99.47 %
90°	4.41	833.67	0.53 %	100.00 %
95°	0.00	833.67	0.00 %	100.00 %
100°	0.00	833.67	0.00 %	100.00 %
105°	0.00	833.67	0.00 %	100.00 %
110°	0.00	833.67	0.00 %	100.00 %
115°	0.00	833.67	0.00 %	100.00 %
120°	0.00	833.67	0.00 %	100.00 %
125°	0.00	833.67	0.00 %	100.00 %
130°	0.00	833.67	0.00 %	100.00 %
135°	0.00	833.67	0.00 %	100.00 %
140°	0.00	833.67	0.00 %	100.00 %
145°	0.00	833.67	0.00 %	100.00 %
150°	0.00	833.67	0.00 %	100.00 %
155°	0.00	833.67	0.00 %	100.00 %
160°	0.00	833.67	0.00 %	100.00 %
165°	0.00	833.67	0.00 %	100.00 %
170°	0.00	833.67	0.00 %	100.00 %
175°	0.00	833.67	0.00 %	100.00 %
180°	0.00	833.67	0.00 %	100.00 %

Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	5.07	10.14	15.22	20.29	25.36	OC	4.34	8.68	13.03	17.37	21.71
OB	5.07	10.14	15.22	20.29	25.36	OD	4.34	8.68	13.03	17.37	21.71

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	112.63	98.64	100.77	112.69	126.80	128.28	128.69	112.65	88.41	13.72
OB	112.63	98.64	100.77	112.69	126.80	128.28	128.69	112.65	88.41	13.72
OC	112.63	97.06	99.87	111.07	124.83	125.39	121.14	109.36	82.77	8.14
OD	112.63	97.06	99.87	111.07	124.83	125.39	121.14	109.36	82.77	8.14

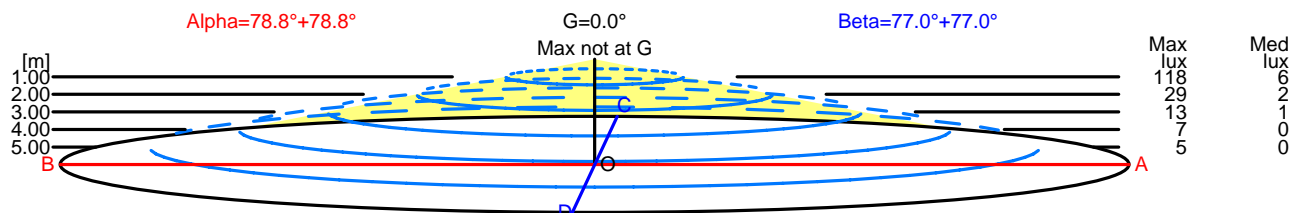


H[m]	D[m]	Max lux	Med lux	Alpha=78.8°+78.8°	G=0.0 Max not at G	
1.00	10.14	118	6			
2.00	20.29	29	2			
3.00	30.43	13	1			
4.00	40.57	7	0			
5.00	50.72	5	0			

H[m]	D[m]	Max lux	Med lux	Beta=77.0°+77.0°	G=0.0 Max not at G	
1.00	8.68	118	6			
2.00	17.37	29	2			
3.00	26.05	13	1			
4.00	34.74	7	0			
5.00	43.42	5	0			

Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

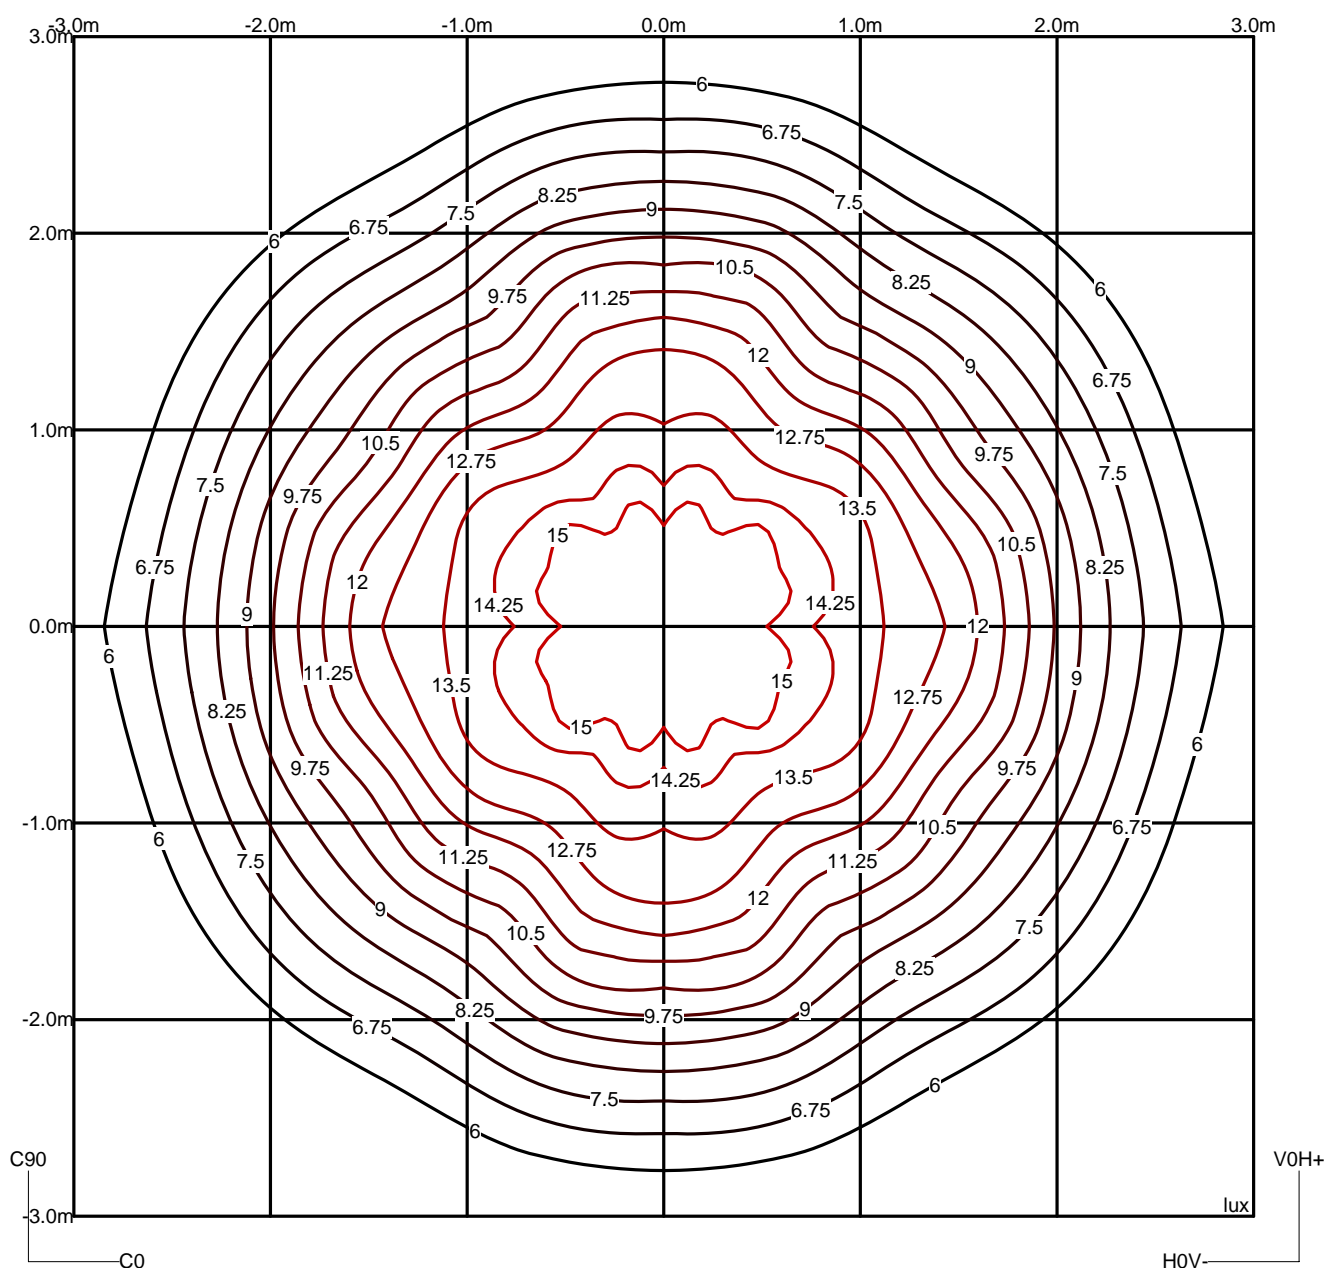

Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	


Utilizations CIE

Mounting	Direct				Normalization				Normalised				Suspension Ratio				Standard CIE Settings					

Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	


Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	
2121	2379	2623	2854	3117	3486	3994	3771	2450	1840	---
2073	2252	2469	2754	3025	3401	3739	2450	1092	---	---

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

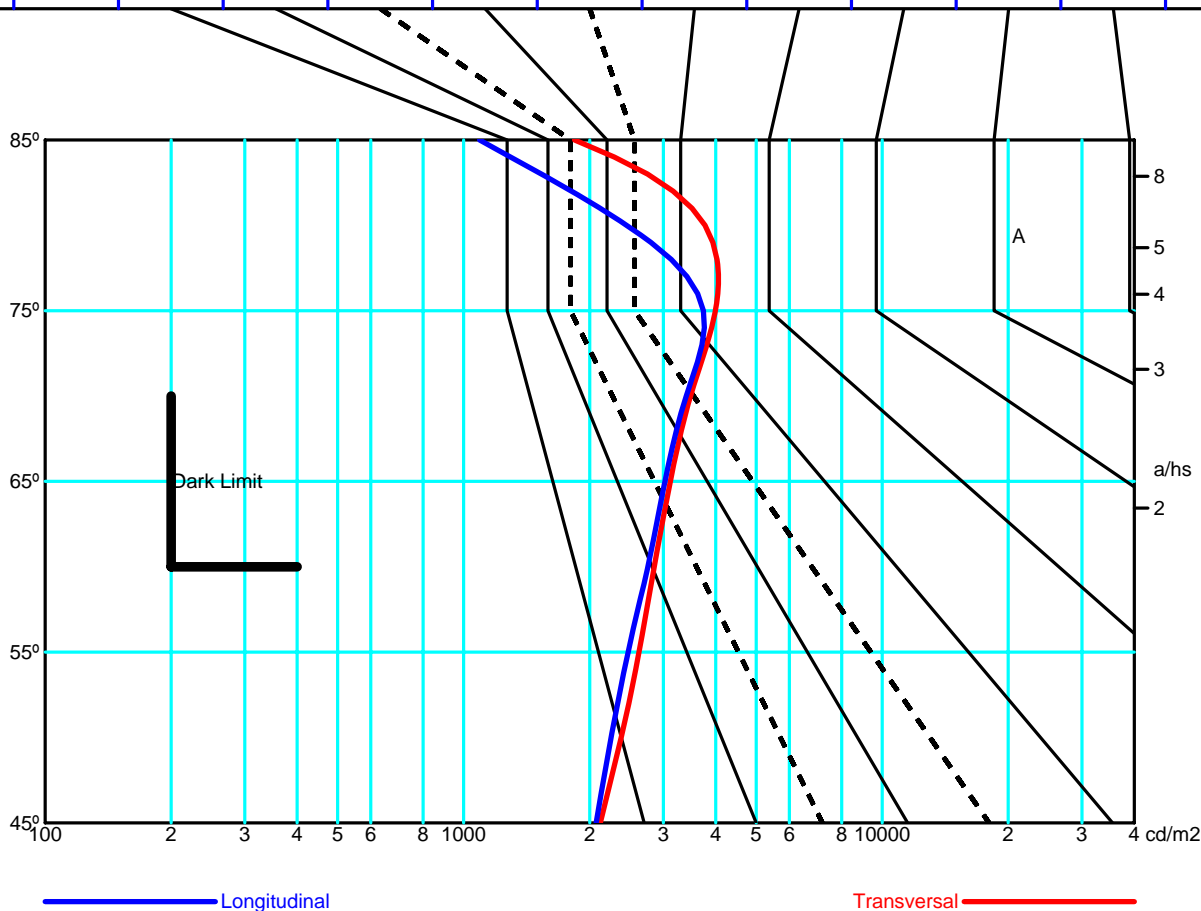

Luminaire		Measur.		Lamp	
Code	PLEAT BOX 36	Code	PLEAT BOX 36	Code	64543 B ECO 46W
Name	PLEAT BOX 36 46W E14	Name	PLEAT BOX 36 46W E14	Number	1
Line	- MARSET	Date	01-04-2015	Position	Universal
Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

Luminance

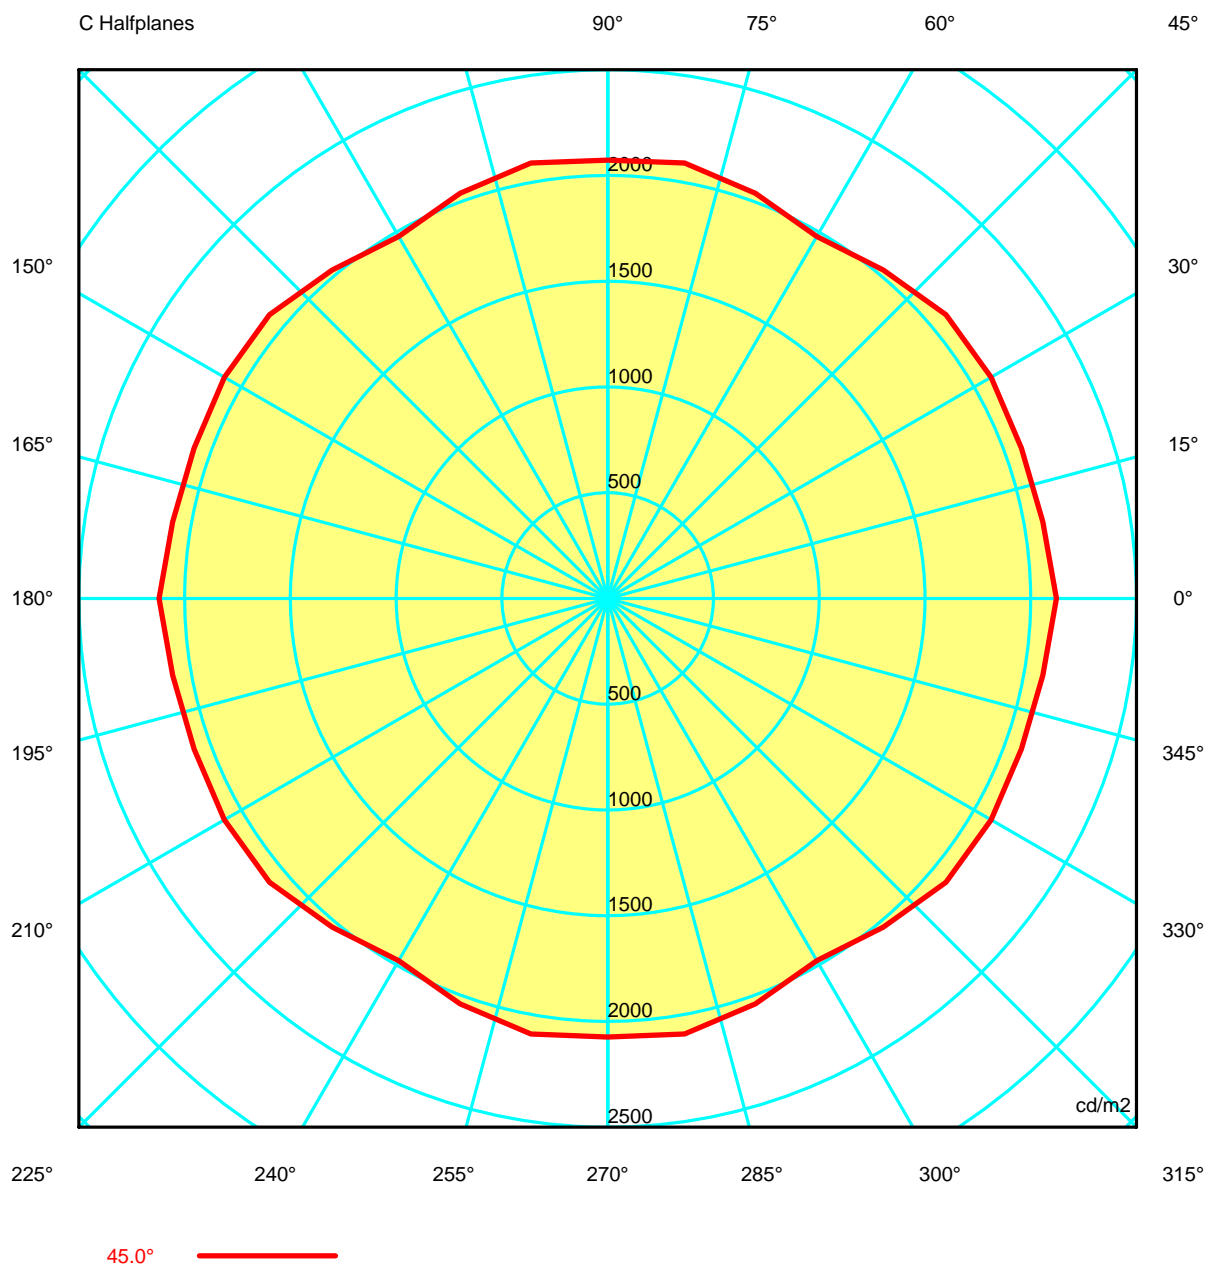

Luminaire				Measur.				Lamp					
Code	PLEAT BOX 36			Code	PLEAT BOX 36			Code	64543 B ECO 46W				
Name	PLEAT BOX 36 46W E14			Name	PLEAT BOX 36 46W E14			Number	1				
Line	- MARSET			Date	01-04-2015			Position	Universal				
Efficiency	83.37%			Coordinate system	CG			Total Flux	700.00 lm				
Maximum value	186.83 cd/klm			Position	C=0.00 G=50.00			Double Symmetrical					
Luminance cd/m2 Table 1/3													
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81
G 5.0	1157.67	1191.93	1196.99	1190.16	1191.59	1184.49	1173.03	1190.16	1184.23	1139.12	1184.23	1190.16	1173.03
G 10.0	1179.04	1198.33	1203.75	1202.58	1208.45	1203.42	1188.52	1204.71	1207.23	1178.49	1207.23	1204.71	1188.52
G 15.0	1219.79	1251.86	1259.36	1258.88	1273.81	1261.20	1217.36	1240.06	1249.58	1208.87	1249.58	1240.06	1217.36
G 20.0	1300.09	1322.21	1332.63	1329.49	1318.56	1298.28	1285.81	1303.05	1310.06	1291.55	1310.06	1303.05	1285.81
G 25.0	1453.77	1445.56	1450.61	1458.02	1440.60	1402.66	1382.94	1419.52	1445.46	1432.90	1445.46	1419.52	1382.94
G 30.0	1650.39	1623.12	1589.69	1563.13	1557.96	1523.05	1494.03	1561.47	1626.69	1641.00	1626.69	1561.47	1494.03
G 35.0	1809.79	1791.36	1744.30	1678.15	1691.22	1669.02	1625.61	1727.26	1804.06	1781.71	1804.06	1727.26	1625.61
G 40.0	1935.21	1929.69	1911.60	1877.82	1861.54	1823.57	1804.36	1887.86	1933.34	1938.02	1933.34	1887.86	1804.36
G 45.0	2121.06	2088.51	2080.94	2092.81	2087.33	2027.80	1977.25	2039.67	2090.85	2073.32	2090.85	2039.67	1977.25
G 50.0	2378.78	2286.85	2270.08	2307.05	2302.30	2247.92	2200.54	2224.74	2246.69	2252.03	2246.69	2224.74	2200.54
G 55.0	2623.29	2529.48	2510.65	2538.66	2516.31	2477.23	2459.35	2466.09	2471.38	2469.27	2471.38	2466.09	2459.35
G 60.0	2853.58	2810.00	2814.56	2826.21	2762.40	2733.64	2737.46	2744.01	2746.38	2753.70	2746.38	2744.01	2737.46
G 65.0	3116.60	3118.15	3136.92	3137.34	3030.78	3010.69	3049.64	3043.09	3031.87	3025.37	3031.87	3043.09	3049.64
G 70.0	3485.60	3458.17	3475.86	3494.80	3320.68	3284.32	3417.20	3422.08	3412.70	3401.46	3412.70	3422.08	3417.20
G 75.0	3993.64	4076.41	4090.56	3997.85	3837.04	3823.91	3965.58	4044.45	3958.62	3739.24	3958.62	4044.45	3965.58
G 80.0	3771.50	2848.48	2699.68	3025.75	2865.37	2821.19	3076.99	3110.44	2862.83	2449.73	2862.83	3110.44	3076.99
G 85.0	1840.10	1444.63	1252.36	1280.26	1367.62	1386.49	1370.57	1402.49	1349.46	1091.52	1349.46	1402.49	1370.57
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire				Measur.				Lamp			
Code	PLEAT BOX 36			Code	PLEAT BOX 36			Code	64543 B ECO 46W		
Name	PLEAT BOX 36 46W E14			Name	PLEAT BOX 36 46W E14			Number	1		
Line	- MARSET			Date	01-04-2015			Position	Universal		

Efficiency	83.37%	Coordinate system	CG	Total Flux	700.00 lm
Maximum value	186.83 cd/klm	Position	C=0.00 G=50.00	Double Symmetrical	

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81
G 5.0	1184.49	1191.59	1190.16	1196.99	1191.93	1157.67	1191.93	1196.99	1190.16	1191.59	1184.49	1173.03	1190.16
G 10.0	1203.42	1208.45	1202.58	1203.75	1198.33	1179.04	1198.33	1203.75	1202.58	1208.45	1203.42	1188.52	1204.71
G 15.0	1261.20	1273.81	1258.88	1259.36	1251.86	1219.79	1251.86	1259.36	1258.88	1273.81	1261.20	1217.36	1240.06
G 20.0	1298.28	1318.56	1329.49	1332.63	1322.21	1300.09	1322.21	1332.63	1329.49	1318.56	1298.28	1285.81	1303.05
G 25.0	1402.66	1440.60	1458.02	1450.61	1445.56	1453.77	1445.56	1450.61	1458.02	1440.60	1402.66	1382.94	1419.52
G 30.0	1523.05	1557.96	1563.13	1589.69	1623.12	1650.39	1623.12	1589.69	1563.13	1557.96	1523.05	1494.03	1561.47
G 35.0	1669.02	1691.22	1678.15	1744.30	1791.36	1809.79	1791.36	1744.30	1678.15	1691.22	1669.02	1625.61	1727.26
G 40.0	1823.57	1861.54	1877.82	1911.60	1929.69	1935.21	1929.69	1911.60	1877.82	1861.54	1823.57	1804.36	1887.86
G 45.0	2027.80	2087.33	2092.81	2080.94	2088.51	2121.06	2088.51	2080.94	2092.81	2087.33	2027.80	1977.25	2039.67
G 50.0	2247.92	2302.30	2307.05	2270.08	2286.85	2378.78	2286.85	2270.08	2307.05	2302.30	2247.92	2200.54	2224.74
G 55.0	2477.23	2516.31	2538.66	2510.65	2529.48	2623.29	2529.48	2510.65	2538.66	2516.31	2477.23	2459.35	2466.09
G 60.0	2733.64	2762.40	2826.21	2814.56	2810.00	2853.58	2810.00	2814.56	2826.21	2762.40	2733.64	2737.46	2744.01
G 65.0	3010.69	3030.78	3137.34	3136.92	3118.15	3116.60	3118.15	3136.92	3137.34	3030.78	3010.69	3049.64	3043.09
G 70.0	3284.32	3320.68	3494.80	3475.86	3458.17	3485.60	3458.17	3475.86	3494.80	3320.68	3284.32	3417.20	3422.08
G 75.0	3823.91	3837.04	3997.85	4090.56	4076.41	3993.64	4076.41	4090.56	3997.85	3837.04	3823.91	3965.58	4044.45
G 80.0	2821.19	2865.37	3025.75	2699.68	2848.48	3771.50	2848.48	2699.68	3025.75	2865.37	2821.19	3076.99	3110.44
G 85.0	1386.49	1367.62	1280.26	1252.36	1444.63	1840.10	1444.63	1252.36	1280.26	1367.62	1386.49	1370.57	1402.49
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire			Measur.			Lamp				
Code	PLEAT BOX 36		Code	PLEAT BOX 36		Code	64543 B ECO 46W			
Name	PLEAT BOX 36 46W E14		Name	PLEAT BOX 36 46W E14		Number	1			
Line	- MARSET		Date	01-04-2015		Position	Universal			
Efficiency	83.37%		Coordinate system	CG		Total Flux	700.00 lm			
Maximum value	186.83 cd/klm		Position	C=0.00 G=50.00		Double Symmetrical				
Luminance cd/m2 Table 3/3										
	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81	1316.81
G 5.0	1184.23	1139.12	1184.23	1190.16	1173.03	1184.49	1191.59	1190.16	1196.99	1191.93
G 10.0	1207.23	1178.49	1207.23	1204.71	1188.52	1203.42	1208.45	1202.58	1203.75	1198.33
G 15.0	1249.58	1208.87	1249.58	1240.06	1217.36	1261.20	1273.81	1258.88	1259.36	1251.86
G 20.0	1310.06	1291.55	1310.06	1303.05	1285.81	1298.28	1318.56	1329.49	1332.63	1322.21
G 25.0	1445.46	1432.90	1445.46	1419.52	1382.94	1402.66	1440.60	1458.02	1450.61	1445.56
G 30.0	1626.69	1641.00	1626.69	1561.47	1494.03	1523.05	1557.96	1563.13	1589.69	1623.12
G 35.0	1804.06	1781.71	1804.06	1727.26	1625.61	1669.02	1691.22	1678.15	1744.30	1791.36
G 40.0	1933.34	1938.02	1933.34	1887.86	1804.36	1823.57	1861.54	1877.82	1911.60	1929.69
G 45.0	2090.85	2073.32	2090.85	2039.67	1977.25	2027.80	2087.33	2092.81	2080.94	2088.51
G 50.0	2246.69	2252.03	2246.69	2224.74	2200.54	2247.92	2302.30	2307.05	2270.08	2286.85
G 55.0	2471.38	2469.27	2471.38	2466.09	2459.35	2477.23	2516.31	2538.66	2510.65	2529.48
G 60.0	2746.38	2753.70	2746.38	2744.01	2737.46	2733.64	2762.40	2826.21	2814.56	2810.00
G 65.0	3031.87	3025.37	3031.87	3043.09	3049.64	3010.69	3030.78	3137.34	3136.92	3118.15
G 70.0	3412.70	3401.46	3412.70	3422.08	3417.20	3284.32	3320.68	3494.80	3475.86	3458.17
G 75.0	3958.62	3739.24	3958.62	4044.45	3965.58	3823.91	3837.04	3997.85	4090.56	4076.41
G 80.0	2862.83	2449.73	2862.83	3110.44	3076.99	2821.19	2865.37	3025.75	2699.68	2848.48
G 85.0	1349.46	1091.52	1349.46	1402.49	1370.57	1386.49	1367.62	1280.26	1252.36	1444.63
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00